

SPILLO

Wall/Ceiling

TYPE:

PROJECT NAME:

MODEL #

FINISH

LED COLOR

OPTIC

DRIVER

VOLTAGE



SPILLO

Marco Pagnoncelli - 2012

Lampada da soffitto a 2, 3, o 5 aste orientabili realizzate in trafilata di ottone sezione 7x7 mm. Disponibile in varie altezze e diverse potenze.

Illuminazione a microstrisce LED ad alta efficienza luminosa. Completa di alimentatore. Finiture colore: verniciato bianco (BI), verniciato nero (NE), bianco+cromo (BI+CR).

Classe energetica A++, A+, A

Modello depositato

Ceiling lamp with 2, 3 or 5 adjustable drawn brass rods, 7x7 mm section.

Available in various dimensions and power levels. Lighting by high luminous efficiency LED micro-strip. Complete with power supply unit. Available in: white varnish (BI), black varnish (NE), white+chrome (BI+CR).

TRIAC Dimming - Works with most of the existing TRIAC dimmers.

Energy class A++, A+, A


Registered design

FINISH

BI = WHITE

NE = BLACK

CR = CHROME

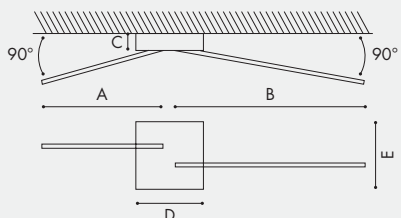

Art.	W	V	Lumen	°K led	A cm	B cm	C cm	D cm	E cm	
SPILLO2.100	19,80	12	1650	3000	50(19.7")	100(39.4")	3(1.2")	18(7.1")	18(7.1")	Integral driver

INPUT VOLTAGE 120V