

# ARBOR

Ceiling

TYPE:

PROJECT NAME:

MODEL #

FINISH

LED COLOR

OPTIC


DRIVER

VOLTAGE





BI

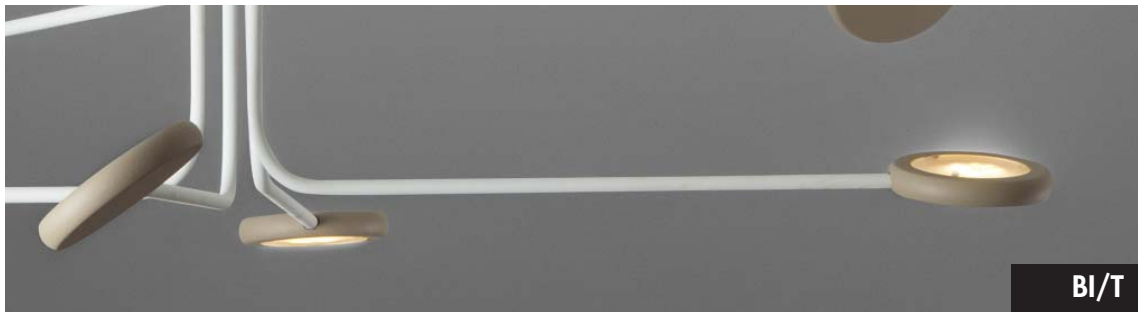

BI/T



OS



BI/AL



RS

BI  
BI/T  
OS  
BI/AL  
RS

BIANCO  
BIANCO - TORTORA  
OROARGENTO  
BIANCO - ALLUMINIO  
RAMEARGENTO

WHITE  
WHITE - DOVE GRAY  
GOLDSILVER  
WHITE - ALUMINIUM  
COPPERSILVER

# ARBOR

Marco Pagnoncelli - 2015

Collezione dal design raffinato ed essenziale realizzata da piccolissimi braccetti metallici a sezione circolare alle cui estremità sono collocate le fonti luminose girevoli di forma tonda nelle quali alloggiano led a 120V che non necessitano di alimentatore.

Questa capacità di orientamento dei corpi luce conferisce a questo prodotto una particolarità importante nel suo genere, in quanto in base all'esigenza dell'utente la luce può essere totalmente indiretta, diretta e indiretta, oppure completamente diretta.

Disponibile nella temperatura colore LED 3000 °K e 2700 °K.

Classe energetica A++, A+, A

Modello depositato





A collection with a refined and essential design. Small metal arms hold turning round light sources in which are housed 120V LED boards, no driver is needed.


By turning the light sources, these fittings are unique because following the customer's taste, they give the chance to have total on partial direct and indirect lighting. Available with 3000 °K or 2700 °K LED colour temperature. **TRIAC Dimming - Works with most of the existing TRIAC dimmers.** Energy class A++, A+, ARegistered design

## FINISH

BI = WHITE  
T = DOVE GREY  
OS = GOLD SILVER  
AL = POLISHED ALUMINIUM  
RS = COPPER SILVER

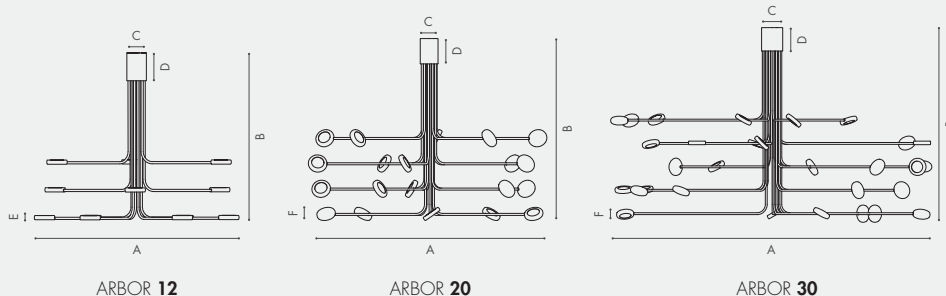

KIT FISSAGGIO  
MAGGIORATO



COD. OP.1

Art.	W	V	Lumen	°K led	A cm	B cm	C cm	D cm	E cm	F cm
ARBOR 12	60	120	4200	3000	70(27.6")	58(22.8")	7 (2.8")	9,5 (3.7")	1,1 (0.4")	Ø7 (2.8")
ARBOR 20	100	120	7000	3000	80(31.5")	58(22.8")	7 (2.8")	9,5 (3.7")	1,1 (0.4")	Ø7 (2.8")
ARBOR 30	150	120	10500	3000	120(47.2")	70(27.6")	10 (3.9")	12 (4.7")	1,1 (0.4")	Ø7 (2.8")

Available in color temperature led 2700 °K

INSTALLATION NOTE: Comes with 4" ROUND BACKPLATE to cover the junction box

